

SonexAsia Absorber Wall/ Ceiling panel LPD

Product advantages

- · Flexibility in dimensions
- · Excellent sound absorption
- Environmental friendly, free from synthetic and natural fibre, halogens and CFC's
- · Cost saving due to reduced installation time
- · Impact resistant
- · Fire retardant

Dimensions

All dimensions in thickness: 30 mm / 50 mm

1200 x 600 (mm)

2400 x 600 (mm)

3000 x 600 (mm)

Product info

Material: Basotect with laminated fleece one side;

back side laminated with aluminium foil

Colour: white

Fire rating according DIN 4102: B1 and BS 476


Part 6 & 7 (flame retardant)

Light reflection: 83%

Temperature stability: 80 Celsius

Resistant against high humidity


Acoustic info: (no air gap)

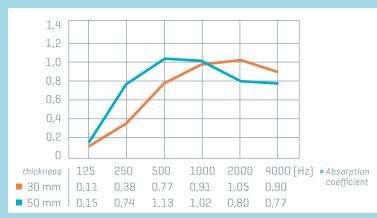

Applications

Absorber Wall/Ceiling panel are used in:

- Shooting ranges
- Auditorium
- · Multi-function rooms

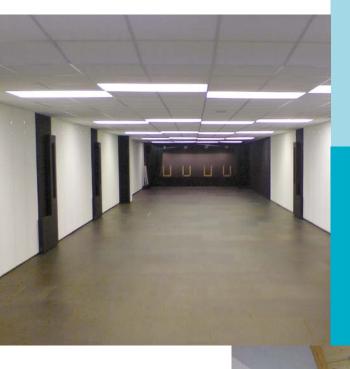

- Fire arms training unit
- > Wall panel installed in shooting range

SonexAsia Ltd.

Hong Kong office: Room E, 6th Floor = Eastern Commercial Centre = 395-399 Hennessy Road = Hong Kong

Shanghai office: No 558 Huanan Road = Huaxin, Qingpu = Shanghai, China

- T +86 21 697 914 71
- F +86 21 697 914 78



www.sonexasia.eu